

FABRICS

COLLECTION



casala

Quality fabrics united for stylish interior concepts

Casala fabrics combine a harmonious blend of colours and patterns ensuring they both complement and integrate effortlessly with each interior concept for professional and public spaces. In today's world, the choice of materials is not just about design and functionality, but also about the broader impact on our environment. Our fabric collection includes several fabrics made from recycled content. We are continuously looking for innovative and sustainable materials while maintaining commitment to quality, sustainability and our philosophy "Design Linked to Functionality".



casala

ARIZONA

FABRIC BAND 1



SPECIFICATIONS

UK MATERIAL
100% POLYESTER

WEIGHT / WIDTH
APPROX. 320 G/M² / APPROX. 140 CM

ABRASION RESISTANCE
100.000 MARTINDALE (ISO 12947/2)

FLAME RETARDENCY
M1 / CRIB 5 / EN 1021/1-2
BS 7176 MEDIUM HAZARD
NF D 60013 CLASS AM 18
CALIFORNIA TB117:2013

FASTNESS TO LIGHT
6 (ISO 105-B02)

FASTNESS TO RUBBING / PILLING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

NL MATERIAAL
100% POLYESTER

GEWICHT / BREEDTE
CA. 320 G/M² / CA. 140 CM

SLIJTWEERSTAND
100.000 MARTINDALE (ISO 12947/2)

BRANDVEILIGHEID
M1 / CRIB 5 / EN 1021/1-2
BS 7176 MEDIUM HAZARD
NF D 60013 CLASS AM 18
CALIFORNIA TB117:2013

LICHTECHTHEID
6 (ISO 105-B02)

WRIJFECHTHEID / PILLING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

DE MATERIAL
100% POLYESTER

GEWICHT / BREITE
CA. 320 G/M² / CA. 140 CM

SCHEUERFESTIGKEIT
100.000 MARTINDALE (ISO 12947/2)

BRANDVERHALTEN
M1 / CRIB 5 / EN 1021/1-2
BS 7176 MEDIUM HAZARD
NF D 60013 CLASS AM 18
CALIFORNIA TB117:2013

LICHTECHTHEIT
6 (ISO 105-B02)

REIBECHTHEID / PILLING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

FR MATÉRIAU
100% POLYESTER

POIDS / LARGEUR
CA. 320 G/M² / CA. 140 CM

SOLIDITÉ À LA LUMIÈRE
100.000 MARTINDALE (ISO 12947/2)

NON FEU
M1 / CRIB 5 / EN 1021/1-2
BS 7176 MEDIUM HAZARD
NF D 60013 CLASS AM 18
CALIFORNIA TB117:2013

SOLIDITÉ LUMIÈRE
6 (ISO 105-B02)

RÉSISTANCE AU FROTTEMENT / PILING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)


SAMPLE SERVICE

The colours in this publication may differ to the original product. We recommend requesting a product sample.

Sample service and further information:
www.casala.com/samples

FLORIDA

(100% POLYESTER, GRS RECYCLED) FABRIC BAND 2




26018




21020




22005




27008




28048

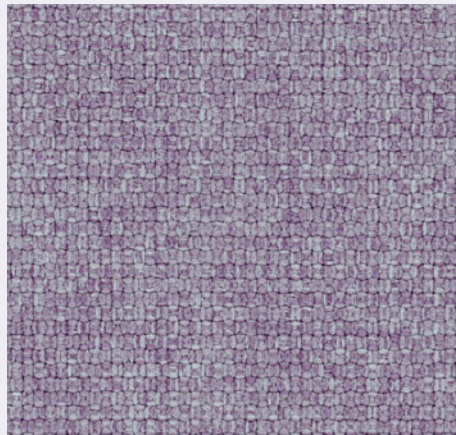


26091




26070




26031




27019




28006




24079




26034




23090



23094



24022



24021

SPECIFICATIONS

UK MATERIAL
100% POLYESTER, GRS 2020-138 RECYCLED

WEIGHT / WIDTH
APPROX. 350 G/M² / APPROX. 140 CM

ABRASION RESISTANCE
100.000 MARTINDALE (ISO 12947/2)

FLAME RETARDENCY
1 IM (UNI 9175) / BS 7176
CALIFORNIA TB 117 /
CRIB 5 (BS 5852 PART II)
EN 1021-1&2 / IMO PART 8

FASTNESS TO LIGHT
6 (ISO 105-B02)

FASTNESS TO RUBBING / PILLING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

NL MATERIAAL
100% POLYESTER, GRS 2020-138 GERECYCLED

GEWICHT / BREEDTE
CA. 350 G/M² / CA. 140 CM

SLIJTWEERSTAND
100.000 MARTINDALE (ISO 12947/2)

BRANDVEILIGHEID
1 IM (UNI 9175) / BS 7176
CALIFORNIA TB 117 /
CRIB 5 (BS 5852 PART II)
EN 1021-1&2 / IMO PART 8

LICHTECHTHEID
6 (ISO 105-B02)

WRIJFECHTHEID / PILLING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

DE MATERIAL
100% POLYESTER, GRS 2020-138 RECYCLED

GEWICHT / BREITE
CA. 350 G/M² / CA. 140 CM

SCHEUERFESTIGKEIT
100.000 MARTINDALE (ISO 12947/2)

BRANDVERHALTEN
1 IM (UNI 9175) / BS 7176
CALIFORNIA TB 117 /
CRIB 5 (BS 5852 PART II)
EN 1021-1&2 / IMO PART 8

LICHTECHTHEIT
6 (ISO 105-B02)

REIBECHTHEID / PILLING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

FR MATÉRIAU
100% POLYESTER, GRS 2020-138 RECYCLÉ

POIDS / LARGEUR
CA. 350 G/M² / CA. 140 CM

SOLIDITÉ À LA LUMIÈRE
100.000 MARTINDALE (ISO 12947/2)

NON FEU
1 IM (UNI 9175) / BS 7176
CALIFORNIA TB 117 /
CRIB 5 (BS 5852 PART II)
EN 1021-1&2 / IMO PART 8

SOLIDITÉ LUMIÈRE
6 (ISO 105-B02)

RÉSISTANCE AU FROTTEMENT / PILING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)


SAMPLE SERVICE

The colours in this publication may differ to the original product. We recommend requesting a product sample.


Sample service and further information:
www.casala.com/samples

CALIFORNIA


(100% RECYCLED POLYESTER) FABRIC BAND 3

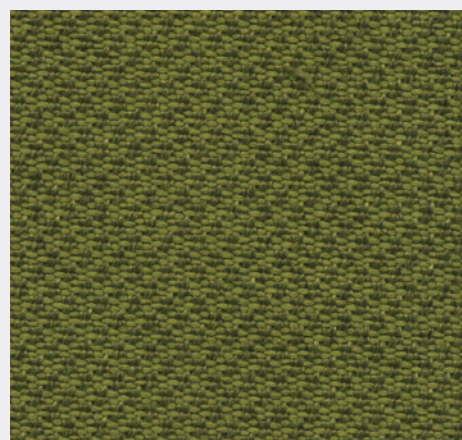


37521




37029




38517




34522




33509




38532




37504




34503




36524



38033



31506



36080

SPECIFICATIONS

UK MATERIAL

100% RECYCLED POLYESTER
SEAQUAL® CERTIFIED

WEIGHT / WIDTH
APPROX. 330 G/M² / APPROX. 140 CM

ABRASION RESISTANCE
100.000 MARTINDALE (ISO 12947/2)

FLAME RETARDENCY
1 IM (UNI 9175)
CALIFORNIA TB 117
EN 1021-1&2
IMO PART 8 / BS 7176 MEDIUM HAZARD

FASTNESS TO LIGHT
6 (ISO 105-B02)

FASTNESS TO RUBBING / PILLING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

NL MATERIAAL

100% RECYCLED POLYESTER
SEAQUAL® CERTIFIED

GEWICHT / BREEDTE
CA. 330 G/M² / CA. 140 CM

SLIJTWEERSTAND
100.000 MARTINDALE (ISO 12947/2)

BRANDVEILIGHEID
1 IM (UNI 9175)
CALIFORNIA TB 117
EN 1021-1&2
IMO PART 8 / BS 7176 MEDIUM HAZARD

LICHTECHTHEID
6 (ISO 105-B02)

WRIJFECHTHEID / PILLING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

DE MATERIAL

100% RECYCLED POLYESTER
SEAQUAL® CERTIFIED

GEWICHT / BREITE
CA. 330 G/M² / CA. 140 CM

SCHEUERFESTIGKEIT
100.000 MARTINDALE (ISO 12947/2)

BRANDVERHALTEN
1 IM (UNI 9175)
CALIFORNIA TB 117
EN 1021-1&2
IMO PART 8 / BS 7176 MEDIUM HAZARD

LICHTECHTHEIT
6 (ISO 105-B02)

REIBECHTHEID / PILLING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

FR MATÉRIAU

100% RECYCLED POLYESTER
SEAQUAL® CERTIFIED

POIDS / LARGEUR
CA. 330 G/M² / CA. 140 CM

SOLIDITÉ À LA LUMIÈRE
100.000 MARTINDALE (ISO 12947/2)

NON FEU
1 IM (UNI 9175)
CALIFORNIA TB 117
EN 1021-1&2
IMO PART 8 / BS 7176 MEDIUM HAZARD

SOLIDITÉ LUMIÈRE
6 (ISO 105-B02)

RÉSISTANCE AU FROTTEMENT / PILING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

SAMPLE SERVICE

The colours in this publication may differ to the original product. We recommend requesting a product sample.

Sample service and further information:
www.casala.com/samples

DAKOTA

FABRIC BAND 3



SPECIFICATIONS

UK MATERIAL
100% TREVIRA CS®

WEIGHT / WIDTH
APPROX. 280 G/M2 / APPROX. 140 CM

ABRASION RESISTANCE
80.000 MARTINDALE (ISO 12947/2)

FLAME RETARDENCY
1 IM (UNI 9175) / AM 18 (NF D 60013)
B1 (DIN 4102) / BS 7176 MEDIUM HAZARD
C1 / CALIFORNIA TB 117 / CRIB 5
EN 1021/1-2 / IMO PART 8 / M1
ONORM B 3825-A 3800-1 CLAS B1-Q-1-TR1

FASTNESS TO LIGHT
6 (ISO 105-B02)

FASTNESS TO RUBBING/ PILING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

NL MATERIAAL
100% TREVIRA CS®

GEWICHT / BREEDTE
CA. 280 G/M2 / CA. 140 CM

SLIJTWEERSTAND
80.000 MARTINDALE (ISO 12947/2)

BRANDVEILIGHEID
1 IM (UNI 9175) / AM 18 (NF D 60013)
B1 (DIN 4102) / BS 7176 MEDIUM HAZARD
C1 / CALIFORNIA TB 117 / CRIB 5
EN 1021/1-2 / IMO PART 8 / M1
ONORM B 3825-A 3800-1 CLAS B1-Q-1-TR1

LICHTECHTHEID
6 (ISO 105-B02)

WRIJFECHTHEID / PILING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

DE MATERIAL
100% TREVIRA CS®

GEWICHT / BREITE
CA. 280 G/M2 / CA. 140 CM

SCHEUERFESTIGKEIT
80.000 MARTINDALE (ISO 12947/2)

BRANDVERHALTEN
1 IM (UNI 9175) / AM 18 (NF D 60013)
B1 (DIN 4102) / BS 7176 MEDIUM HAZARD
C1 / CALIFORNIA TB 117 / CRIB 5
EN 1021/1-2 / IMO PART 8 / M1
ONORM B 3825-A 3800-1 CLAS B1-Q-1-TR1

LICHTECHTHEIT
6 (ISO 105-B02)

REIBECHTHEID / PILING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

FR MATÉRIAU
100% TREVIRA CS®

POIDS / LARGEUR
CA. 280 G/M2 / CA. 140 CM

SOLIDITÉ À LA LUMIÈRE UNI
80.000 MARTINDALE (ISO 12947/2)

NON FEU
1 IM (UNI 9175) / AM 18 (NF D 60013)
B1 (DIN 4102) / BS 7176 MEDIUM HAZARD
C1 / CALIFORNIA TB 117 / CRIB 5
EN 1021/1-2 / IMO PART 8 / M1
ONORM B 3825-A 3800-1 CLAS B1-Q-1-TR1

SOLIDITÉ LUMIÈRE
6 (ISO 105-B02)

RÉSISTANCE AU FROTTEMENT / PILING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

SAMPLE SERVICE

The colours in this publication may differ to the original product. We recommend requesting a product sample.

Sample service and further information:
www.casala.com/samples

OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100



5 YEAR
GUARANTEE



GEORGIA

FABRIC BAND 4



SPECIFICATIONS

UK MATERIAL
100% TREVIRA CS®

WEIGHT / WIDTH
APPROX. 400 G/M2 / APPROX. 150 CM

ABRASION RESISTANCE
75.000 MARTINDALE (ISO 12947/2)

FLAME RETARDENCY
B1 / M1 / CRIB 5 / EN 1021/1-2
IMO RES. A 652 (16) PART 8
BS 7176 MEDIUM HAZARD
NF D 60013 CLASS AM 18

FASTNESS TO LIGHT
6 (ISO 105-B02)

FASTNESS TO RUBBING / PILLING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

NL MATERIAAL
100% TREVIRA CS®

GEWICHT / BREEDTE
CA. 400 G/M2 / CA. 150 CM

SLIJTWEERSTAND
75.000 MARTINDALE (ISO 12947/2)

BRANDVEILIGHEID
B1 / M1 / CRIB 5 / EN 1021/1-2
IMO RES. A 652 (16) PART 8
BS 7176 MEDIUM HAZARD
NF D 60013 CLASS AM 18

LICHTECHTHEID
6 (ISO 105-B02)

WRIJFECHTHEID / PILLING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

DE MATERIAL
100% TREVIRA CS®

GEWICHT / BREITE
CA. 400 G/M2 / CA. 150 CM

SCHEUERFESTIGKEIT
75.000 MARTINDALE (ISO 12947/2)

BRANDVERHALTEN
B1 / M1 / CRIB 5 / EN 1021/1-2
IMO RES. A 652 (16) PART 8
BS 7176 MEDIUM HAZARD
NF D 60013 CLASS AM 18

LICHTECHTHEIT
6 (ISO 105-B02)

REIBECHTHEID / PILLING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

FR MATÉRIAU
100% TREVIRA CS®

POIDS / LARGEUR
CA. 400 G/M2 / CA. 150 CM

SOLIDITÉ À LA LUMIÈRE
75.000 MARTINDALE (ISO 12947/2)

NON FEU
B1 / M1 / CRIB 5 / EN 1021/1-2
IMO RES. A 652 (16) PART 8
BS 7176 MEDIUM HAZARD
NF D 60013 CLASS AM 18

SOLIDITÉ LUMIÈRE
6 (ISO 105-B02)

RÉSISTANCE AU FROTTEMENT / PILING
4-5 (ISO 105-X12) / 5 (ISO 12945-2)

SAMPLE SERVICE

The colours in this publication may differ to the original product. We recommend requesting a product sample.

Sample service and further information:
www.casala.com/samples

casala

www.casala.com